**Fig-1**

Common Parts Matrix					
	A	B	C	D	E
A	42				
B	40	51			
C	24	2	65		
D	41	9	1	65	
E	27	305	2	54	60

Different Parts Matrix					
	A	B	C	D	E
A	0				
B	13	0			
C	59	112	0		
D	25	98	128	0	
E	48	51	21	17	0

Minutes to Load Feeders					
	A	B	C	D	E
A	0				
B	39	0			
C	177	336	0		
D	75	294	384	0	
E	144	153	63	51	0

Fig-2

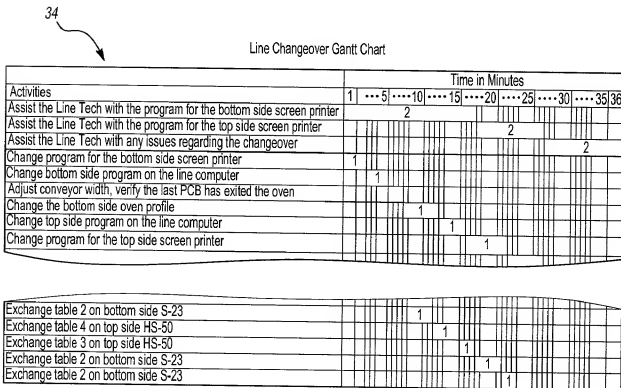
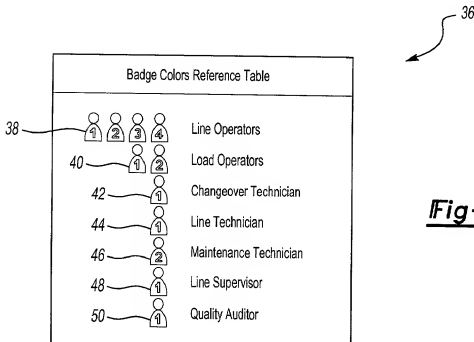
32

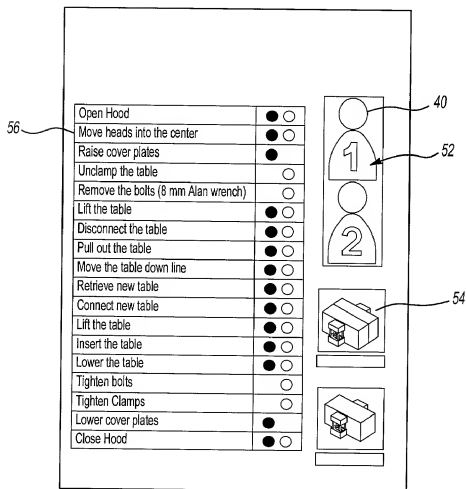
Number of Feeder Tables to Replace

	0	1	2	3	4	5	6	7	8	9	10
0	0	3	6	9	12	15	18	21	24	27	30
1	2	5	8	11	14	17	20	23	26	29	32
2	4	7	10	13	16	19	22	25	28	31	34
3	6	9	12	15	18	21	24	27	30	33	36
4	8	11	14	17	20	23	26	29	32	35	38
5	10	13	16	19	22	25	28	31	34	37	40

26	52	55	58	61	64	67	70	73	76	79	82
27	54	57	60	63	66	69	72	75	78	81	84
28	56	59	62	65	68	71	74	77	80	83	86
29	58	61	64	67	70	73	76	79	82	85	88
30	60	63	66	69	72	75	78	81	84	87	90

Fig-3

**Fig-4****Fig-5**

**Fig-6A**

58

Insure last PCB exits all bottom side processes	1
Adjust bottom side conveyors after the oven	1
Adjust shuttle width between top & bottom side	1
Operate Siplace machines as first PCB is passed through bottom side	1
Maintain operating machines through rest of changeover	1
Adjust width of board loader	1
Adjust conveyor width between board loader & screen printer	2
Adjust conveyor width between screen printer & Siplace machine	2
Assist Maintenance Tech with screen printer	2
Operate screen printer as first PCB is passed through bottom side	2
Operate screen printer through rest of changeover	2

Fig-6B

60













Operate top side equipment until last PCB enters Siplace equipment	
Insures last PCB exits all top side processes	
Adjust conveyor width between Siplace machines & oven	
Adjust conveyor width after the oven	
Operate Siplace machines as first PCB is passed through top side	
Maintain operating machines through rest of changeover	
Prepare screen printer for changeover	
Assist line tech with screen printer	
Adjust conveyor width between screen printer & Siplace machine	
Assist maintenance tech with screen printer	
Operate screen printer as first PCB is passed through top side	
Operate screen printer through rest of changeover	

Fig-6C












Assist the Line Tech with the program for the bottom side screen printer		46
Assist the Line Tech with the program for the top side screen printer		
Assist the Line Tech with any issues regarding the changeover		
Change program for the bottom side screen printer		44
Change bottom side program on the line computer		
Adjust conveyor width, verify the last PCB has exited the oven		
Change the bottom side oven profile		
Change top side program on the line computer		
Change program for the top side screen printer		
Change the top side oven profile		
Address any issues regarding the changeover		

Fig-6D




	44
Verify that the last PCB has exited the Sipplace machines	
Check nozzle configuration for the new setup on bottom side	
Check nozzle configuration for the new setup on top side	
Assist on any issues regarding the changeover	

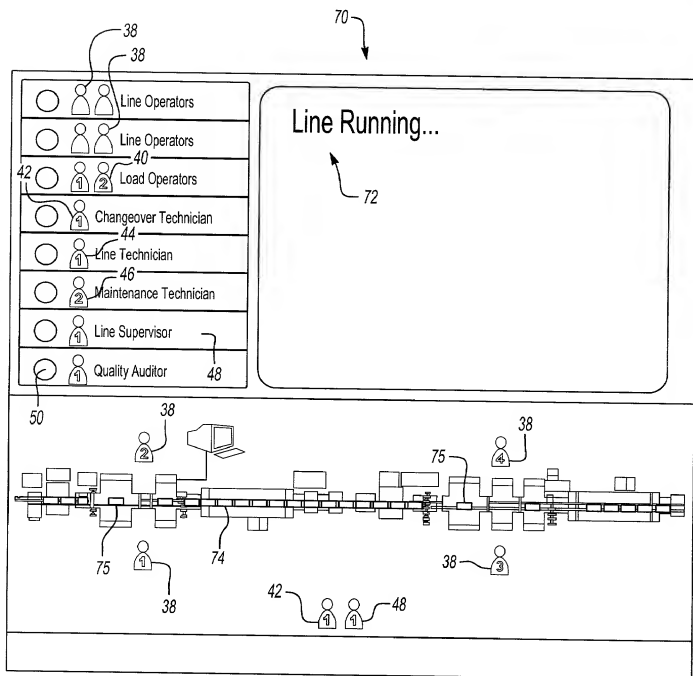
Fig-6E

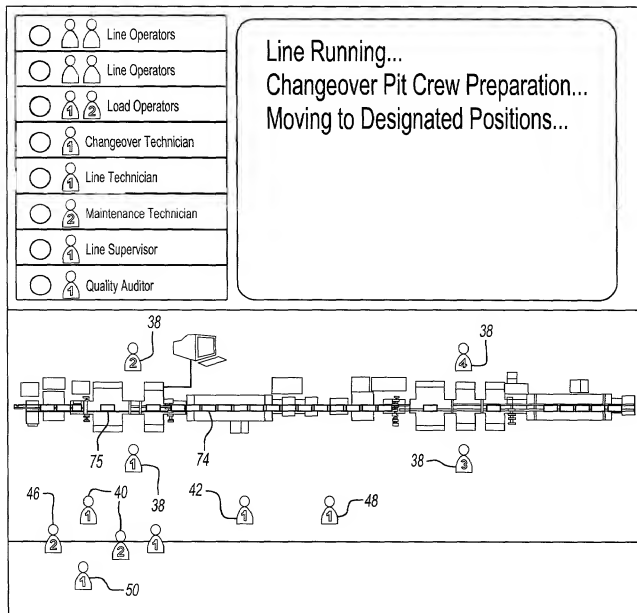
66

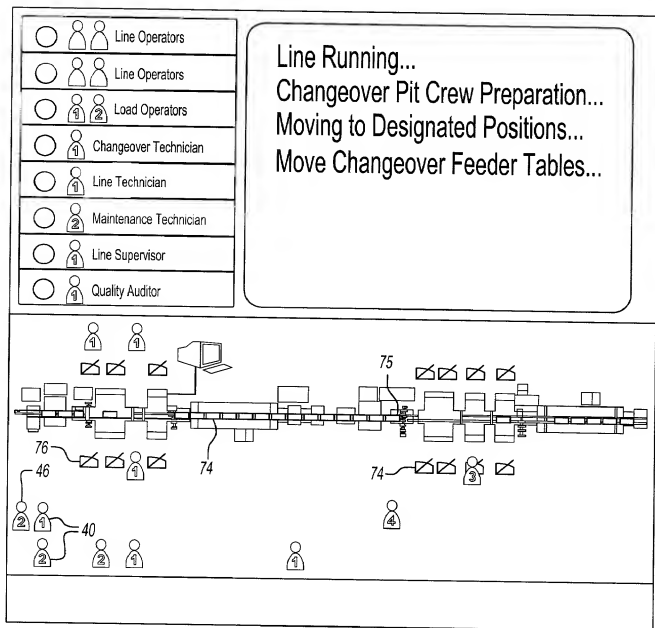
**Fig-6F**

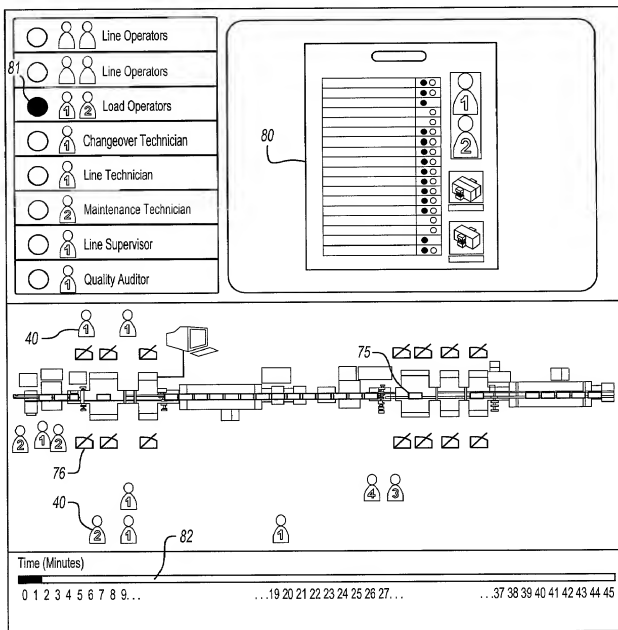
09915157.072501

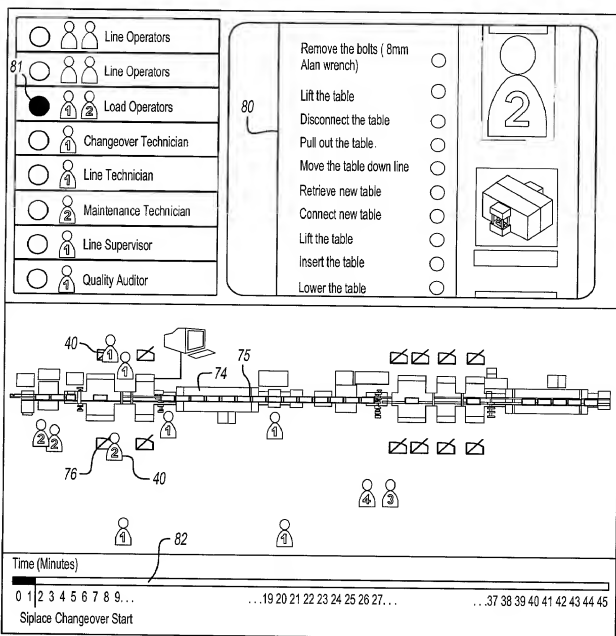
Fig-6G

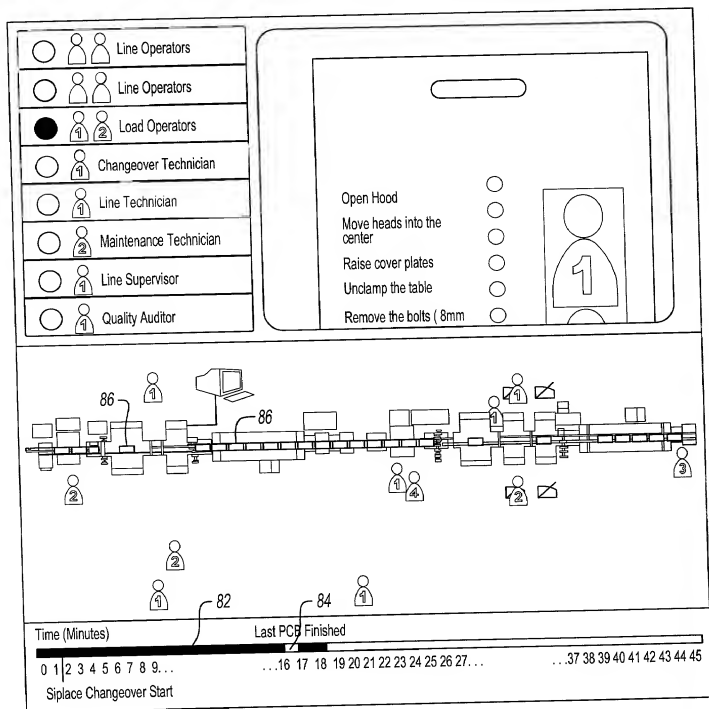
**Fig-7A**

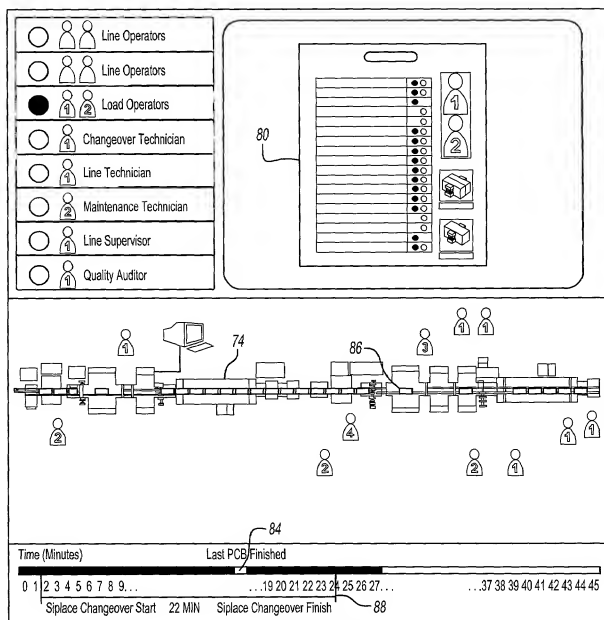
**Fig-7B**

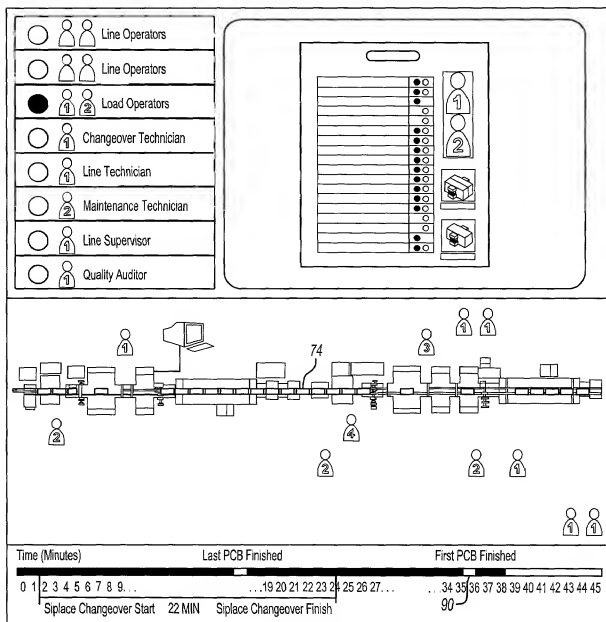
**Fig-7C**

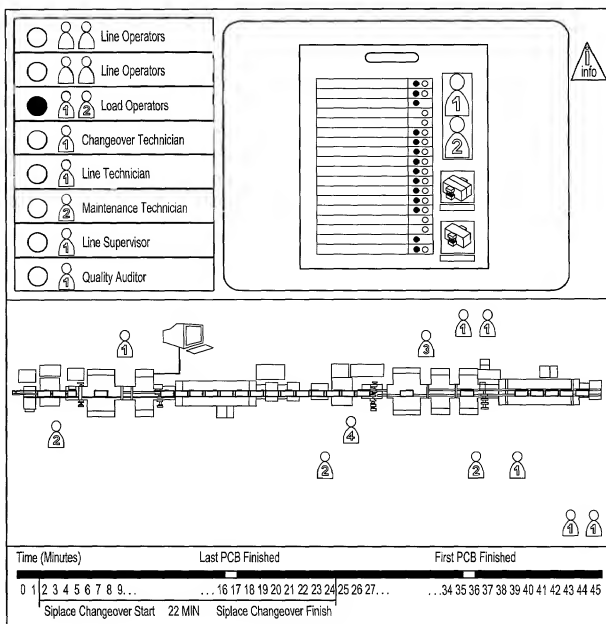
**Fig-7D**

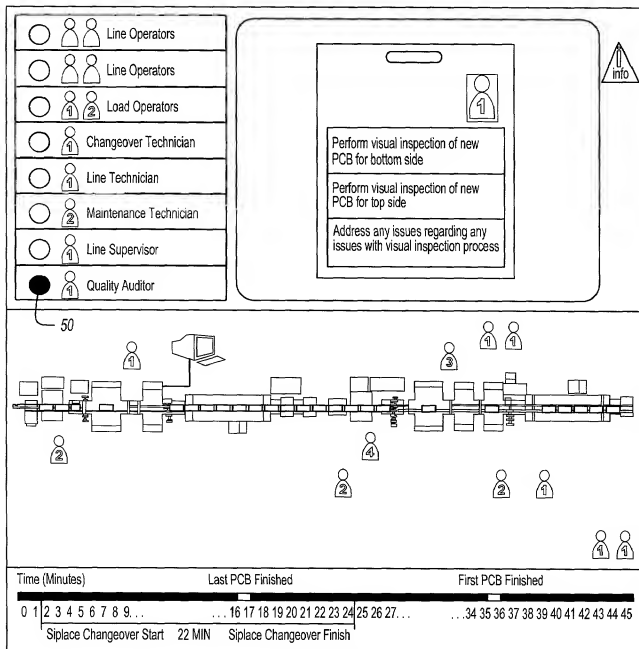
**Fig-7E**

***Fig-7F***

**Fig-7G**

**Fig-7H**

**Fig-71**

**Fig-7J**